



WHY VENTILATE YOUR TILE ROOF?

TRA's Cool Roof Ventilation Systems offer many benefits and energy efficient savings. According to a study done by Oakridge National Laboratory, "Venting caused a significant 50% reduction in the heat penetrating the conditioned space compared to the direct-nailed asphalt shingle roof that is in direct contact with the roof deck."

William A. Miller, Ph.D.

Buildings Technology Center, Oak Ridge National Laboratory


Study Cited: Steep-slope Assembly Testing of Clay and Concrete Tile with and without Cool Pigmented Colors - October 2005

ABOUT COOL ROOF SYSTEMS

A Cool Roof system promotes a constant temperature from eave to ridge, reducing ice dams in winter months while providing energy efficiency and reducing costs all year.

50% Reduction in the amount of heat penetrating the attic space when compared to direct to deck installations *

22% Reduction in **cooling costs****

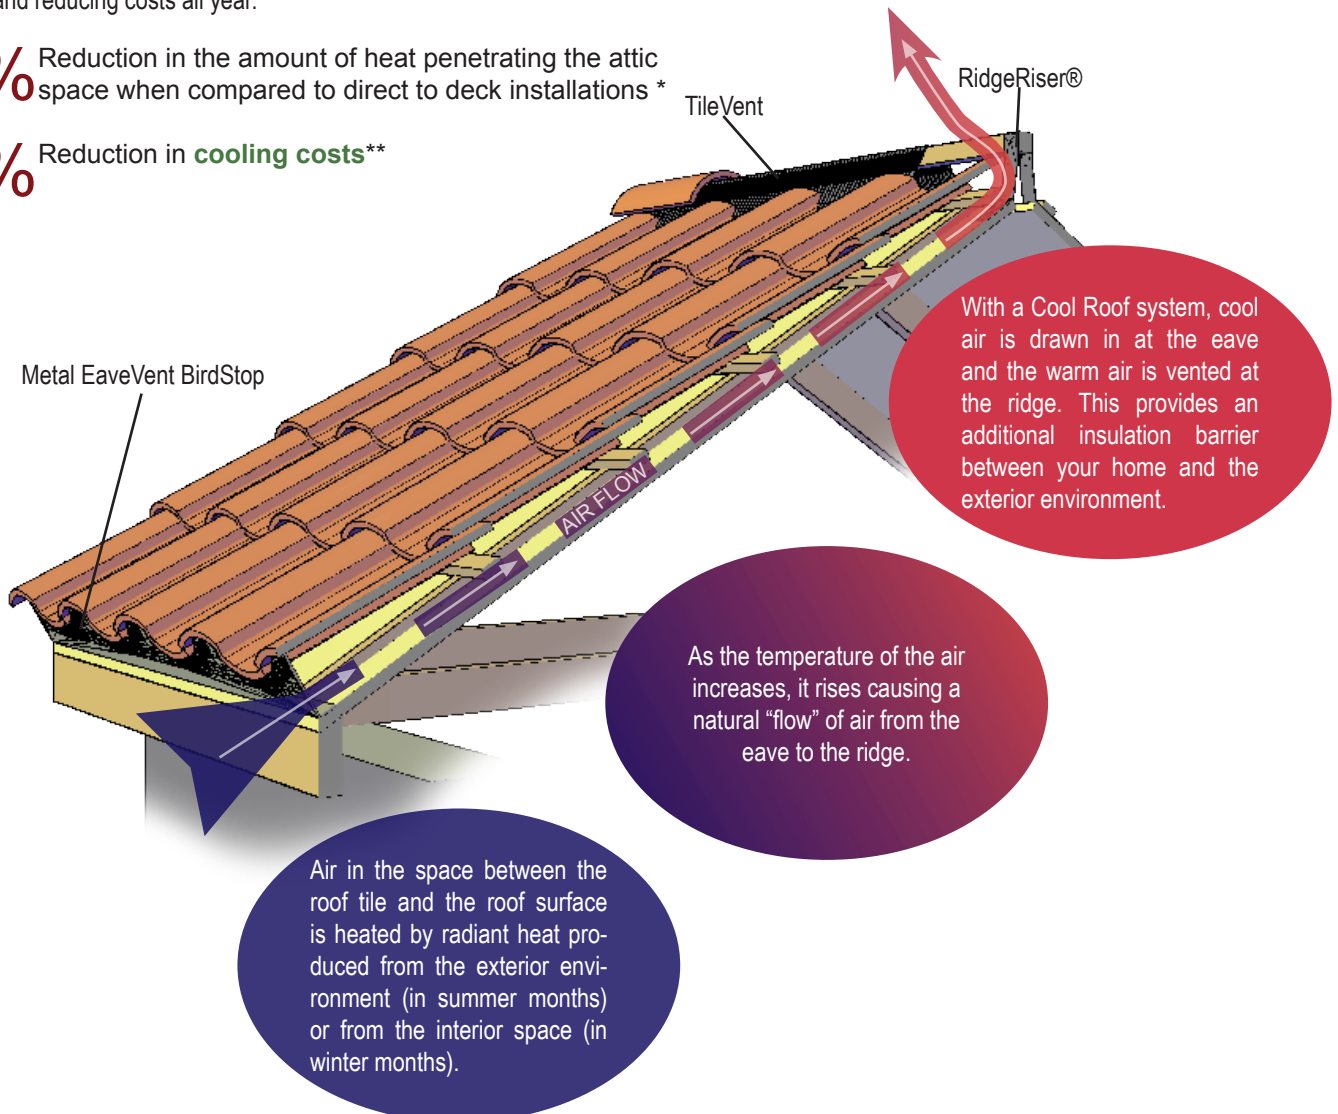


*Up to 50% reduction Steep-slope Assembly Testing of Clay and Concrete Tile with and without Cool Pigmented Colors, Oak Ridge National Laboratory, 2005. Results vary based on profile of tile installed.
**Up to 22% reduction Steep-slope Assembly Testing of Clay and Concrete Tile with and without Cool Pigmented Colors, Oak Ridge National Laboratory, 2005. Results vary based on profile of tile installed.



PRODUCT DETAILS

TileVent



DESCRIPTION

- 10 sq. in. of net free air per linear foot
- ICC Approval #ESR-1787
- Competitively priced
- Fully recyclable
- Light weight
- Butyl adhesive attachment
- All metal construction made of painted aluminum or copper
- Easily conforms to all tile profiles
- Quick and easy installation



RidgeRiser™



DESCRIPTION

- Galvanized for rust protection
- Elevates the nailing board for proper ventilation
- Easy application for hip and ridge tiles
- Adjustable for different tile profiles
- Designed for 2x2 Hip and Ridge boards

MATERIALS

- 16 ga. galvanized steel

COLOR/FINISHES

- Galvanized Steel



Metal EaveVent Birdstop



Horizontal Batten and
Direct to Deck Applications
More profiles available soon

DESCRIPTION


- Designed for use with Eagle® Tile
- 7 square inches of net free area per linear foot
- Pre-punched nail holes for easy installation
- For use with batten, counter batten and direct to deck systems

MATERIALS

- 28ga Pre-Galvanized Steel (ASTM A 653, G30, Hot dipped)
- Aluminum
- Copper
- Overall dimensions: 1-1/4"W x 4-3/4"H x 120"L

COLOR/FINISHES

- Pre-painted: Black, Bronze & Terracotta
- Mill finish aluminum
- Raw Copper
- Powder coating available

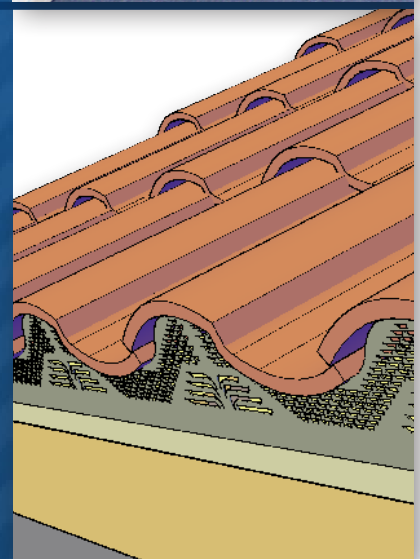

1657 South 580 East
American Fork, UT 84003