

SNOW BRACKET™ LUDOWICI® INTERLOCKING

DESCRIPTION

- Designed for Ludowici® Interlocking tile roofs
- Can be used with all Ludowici Interlocking tiles: Americana, Classic, Lanai, Williamsburg & French
- Formed to match tile's interlocking profile
- End of bracket formed to lock onto upper end of tile for ease of installation
- Superior strength
- Can be powder coated to match roofing material color
- Overall dimensions: 1-3/16"W X 3-11/16"H X 15"L


MATERIALS

- Steel :: 16 ga (ASTM A879)
- Copper :: 48 oz (ASTM B152)
- Cor-Ten® :: 16 ga (ASTM A606)
- Stainless Steel :: 16 ga (ASTM A240)
- Aluminum :: .063" (H32 - ASTM B209)

COLORS/FINISHES

- Electro-galvanized steel
- Hot-dipped galvanized steel
- Mill finish Aluminum
- Mill finish Copper
- Mill finish Cor-Ten®
- Powder coating available in many colors visit <http://trasnowandsun.com/color-chart/> to see color chart

NOTE: Due to specific job conditions, TRA Snow and Sun will only warranty a snow retention system/layout that has been designed by TRA Snow and Sun.

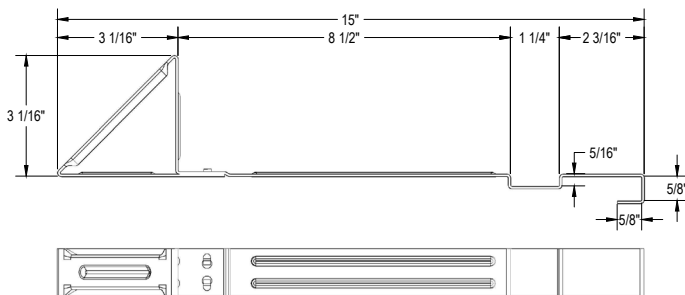

DIMENSIONS


DO NOT SCALE

*Dimensions shown are in inches.



FOR INTERLOCKING TILE ROOFS

USED ON AMERICANA, CLASSIC,
LANAI, WILLIAMSBURG & FRENCH

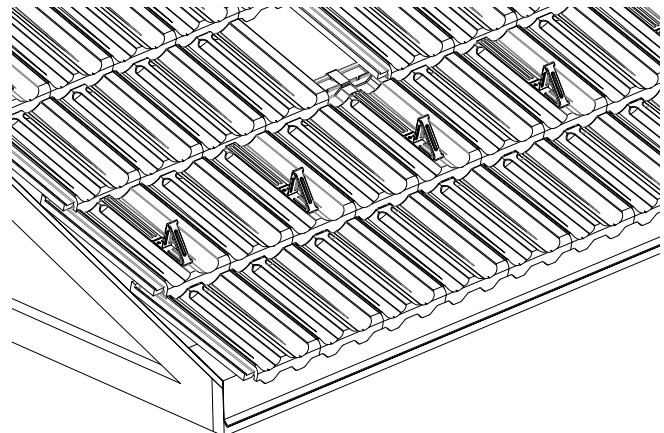

**SNOW BRACKET
'LUDOWICI
INTERLOCKING'
TILE ROOF**

INSTALLATION:
SNOW BRACKET HOOKS TO UPPER
END OF ROOF TILE. BRACKET IS
INSTALLED WITH TRIANGULAR END
OF BRACKET AT BUTT END OF
ROOF TILE AND UPPER END UNDER
THE COURSE ABOVE.

INSTALLATION

DO NOT SCALE

SNOW RETENTION SYSTEMS