

SNOW BRACKET[™] D - CLASSIC

DESCRIPTION

- Designed for new construction asphalt shingles
- Can be used with most asphalt shingle makes or models
- Installed as shingles are installed
- Bracket fastens to roof sheathing
- Superior strength
- Can be powder coated to match roofing material color
- Overall dimensions: 1-3/16"W X 3"H X 10"L

MATERIALS

- Zinc Coated Steel: 16 ga (ASTM A653)
- Copper: 48 oz (ASTM B152)
- Stainless Steel: 16 ga (ASTM A240)

COLORS/FINISHES


- Zinc Plated
- Powder coating available in many colors visit <u>http://trasnowandsun.com/color-chart/</u> to see color chart


NOTE: Due to specific job conditions, TRA Snow and Sun will only warranty a snow retention system/layout that has been designed by TRA Snow and Sun.



FOR NEW CONSTRUCTION

USED ON: ASPHALT SHINGLES

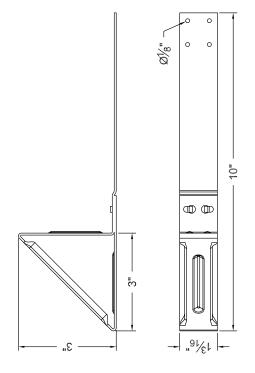

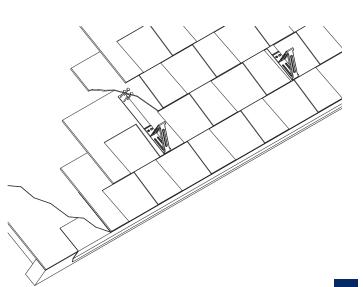

Bracket to be installed using (4) #8 stainless steel screws or roofing nails fastened through roofing material and sheathing below. Fasteners should be hidden under roofing material course above.

SNOW RETENTION SYSTEMS

©TRA Snow and Sun, Inc., 2022

