



SNOW BRACKET™ LUDOWICI® MID

DESCRIPTION

- Designed for Ludowici® Flat tile, S-Tile, and Pan & Cover Tile
- Can be used with Ludowici® Flat Slab, Antique, Brittany, Calais, Colonial, Crude, Norman, Provincial, Georgian, Greek, Roman, & Tapered Mission tiles
- Formed to correspond to tile's length
- Bracket fastens to roof sheathing material
- Superior strength
- Can be powder coated to match roofing material color
- Overall dimensions: 1-3/16"W X 3-9/16"H X VAR"L

MATERIALS

- Steel :: 16 ga (ASTM A879)
- Copper :: 48 oz (ASTM B152)
- Cor-Ten® :: 16 ga (ASTM A606)
- Stainless Steel :: 16 ga (ASTM A240)
- Aluminum :: .063" (H32 - ASTM B209)

COLORS/FINISHES

- Electro-galvanized steel
- Hot-dipped galvanized steel
- Mill finish Aluminum
- Mill finish Copper
- Mill finish Cor-Ten®
- Powder coating available in many colors visit <http://trasnowandsun.com/color-chart/> to see color chart


NOTE: Due to specific job conditions, TRA Snow and Sun will only warranty a snow retention system/layout that has been designed by TRA Snow and Sun.



FOR MID PROFILE FLAT, PAN & COVER TILE ROOFS


USED ON ANTIQUE, BRITTANY, CALAIS, COLONIAL, CRUDE, FLAT SLAB, GEORGIAN, GREEK, NORMAN, PROVINCIAL, ROMAN, TAPERED MISSION

LUDOWICI® TILE BRACKET LENGTHS					
Tile Name	Bracket Length	Tile Name	Bracket Length	Tile Name	Bracket Length
Flat Slab	16 1/2"	Colonial	19"	Georgian	19 3/8"
Antique	16 1/2"	Crude	16 1/2"	Greek	17 1/4"
Brittany	16 1/2"	Norman	19 3/8"	Roman	17 1/4"
Calais	19 3/8"	Provincial	19 3/8"	Tapered Mission	19 3/8"

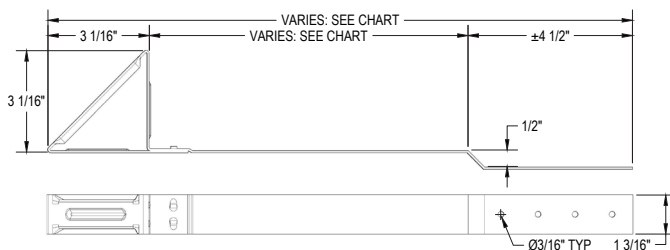

DIMENSIONS

DO NOT SCALE

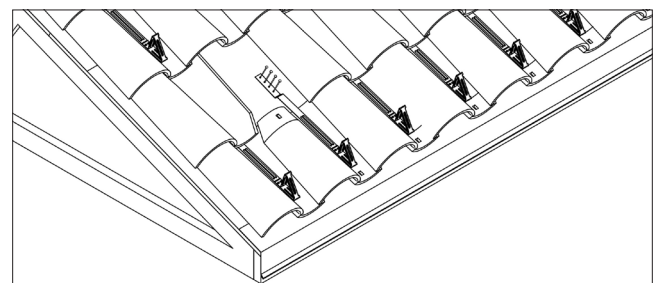

**SNOW BRACKET
'LUDOWICI MID PROFILE'
TILE ROOF**

INSTALLATION:
BRACKET IS INSTALLED WITH FOUR 2" ROOFING NAILS DIRECTLY INTO SHEATHING WITH TRIANGULAR END OF BRACKET AT EAVE END OF TILE AND UPPER END UNDER TILE IN COURSE ABOVE.

SNOW RETENTION SYSTEMS

*Dimensions shown are in inches.