



SNOW BRACKET™ A - CLASSIC

DESCRIPTION

- Designed for use with concrete tiles which are installed using horizontal battens
- No fasteners required
- Powder coated to match roofing material color
- Overall dimensions: 18-1/2" L X 1-3/16" W X 3" H

MATERIALS

- Paintlok Steel: 16 ga
- Copper: 48 oz (ASTM B152)
- Stainless Steel: 16 ga (ASTM A240)

COLORS/FINISHES


- Zinc Plated
- Powder coating available in many colors visit <http://trasnowandsun.com/color-chart/> to see color chart

NOTE: Due to specific job conditions, TRA Snow and Sun will only warranty a snow retention system/layout that has been designed by TRA Snow and Sun.



FOR NEW CONSTRUCTION OR RETROFIT


USED ON: EAGLE, BORAL, HANSON AND OTHER SIMILAR TILES

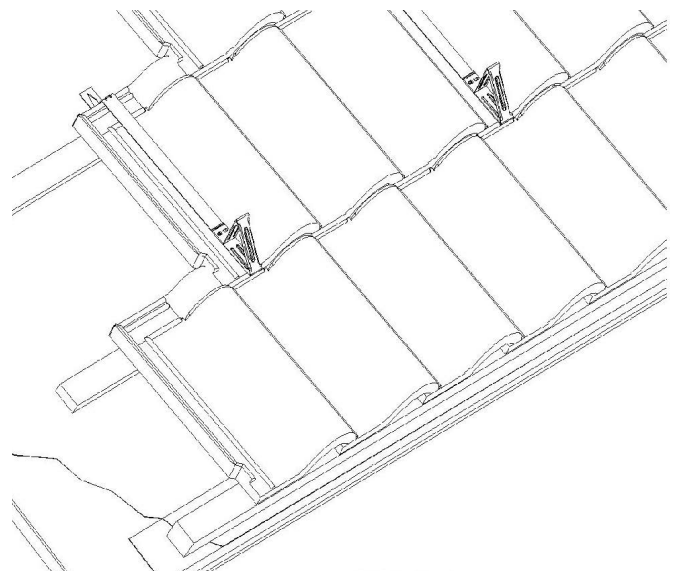

INSTALLATION:
SNOW BRACKET IS INSTALLED ON THE TOP SURFACE OF THE TILE WITH THE TRIANGULAR END OF THE BRACKET OVER THE HEADLAP OF THE TILE AND THE SPIKE INSTALLED INTO 1 X 2 BATTEN.

INSTALLATION
DO NOT SCALE

SNOW RETENTION SYSTEMS

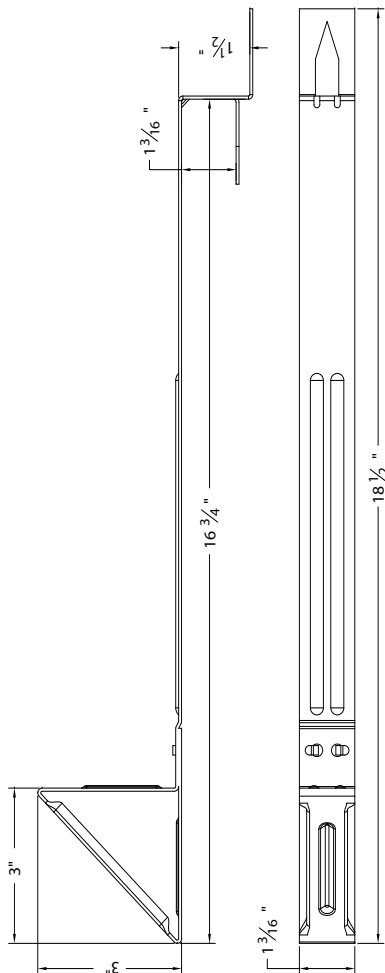

DIMENSIONS *Dimensions shown are in inches.
DO NOT SCALE