



## SNOW BRACKET™ FX EXTENDED - CLASSIC

### DESCRIPTION

- Designed for slate, simulated slate, wood shake, cedar shingles and asphalt shingles
- Installed using (4) 2" roofing nails or #8 stainless steel screws
- Can be powder coated to match roofing material color
- Overall dimensions: 19-1/2"L X 1-3/16"W X 3" H
- Can be manufactured in custom lengths

### MATERIALS

- Paintlok Steel: 16 ga
- Copper: 48 oz (ASTM B152)
- Stainless Steel: 16 ga (ASTM A240)

### COLORS/FINISHES



- Zinc Plated
- Powder coating available in many colors visit <http://trasnowandsun.com/color-chart/> to see color chart

**NOTE:** Due to specific job conditions, TRA Snow and Sun will only warranty a snow retention system/layout that has been designed by TRA Snow and Sun.



### FOR NEW CONSTRUCTION

**USED ON: ASPHALT SHINGLES, CEDAR SHINGLES, WOOD SHAKES, SLATE AND SIMULATED SLATE**

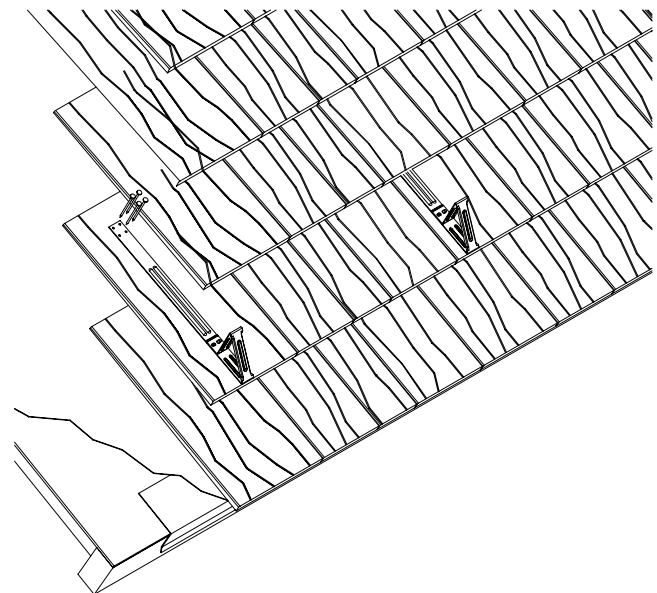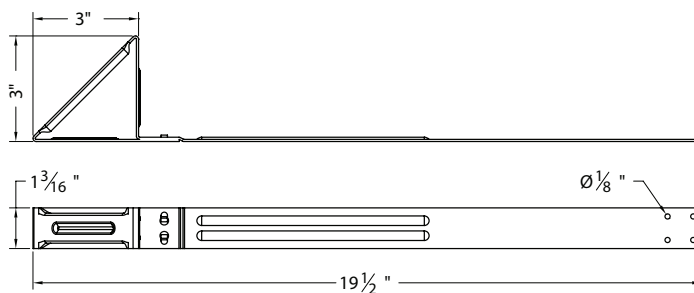

Bracket to be installed using (4) #8 stainless steel screws or roofing nails fastened through roofing material and sheathing below.

### INSTALLATION DO NOT SCALE

## SNOW RETENTION SYSTEMS

**DIMENSIONS** \*Dimensions shown are in inches.  
DO NOT SCALE