



SNOW BRACKET™ LUDOWICI® INTERLOCKING - APEX

DESCRIPTION

- Designed for Ludowici® Interlocking tile roofs
- Can be used with all Ludowici Interlocking tiles: Americana, Classic, Lanai, Williamsburg & French
- Formed to match tile's interlocking profile
- End of bracket formed to lock onto upper end of tile for ease of installation
- Superior strength
- Can be powder coated to match roofing material color
- Overall dimensions: 2.25"W X 3"H X 15.33"L

MATERIALS

- Paintlok Steel: 16 ga
- Copper: 48 oz (ASTM B152)
- Stainless Steel: 16 ga (ASTM A240)

COLORS/FINISHES



- Zinc Plated
- Powder coating available in many colors visit <http://trasnowandsun.com/color-chart/> to see color chart

NOTE: Due to specific job conditions, TRA Snow and Sun will only warranty a snow retention system/layout that has been designed by TRA Snow and Sun.



FOR INTERLOCKING TILE ROOFS

USED ON AMERICANA, CLASSIC, LANAI, WILLIAMSBURG, AND FRENCH

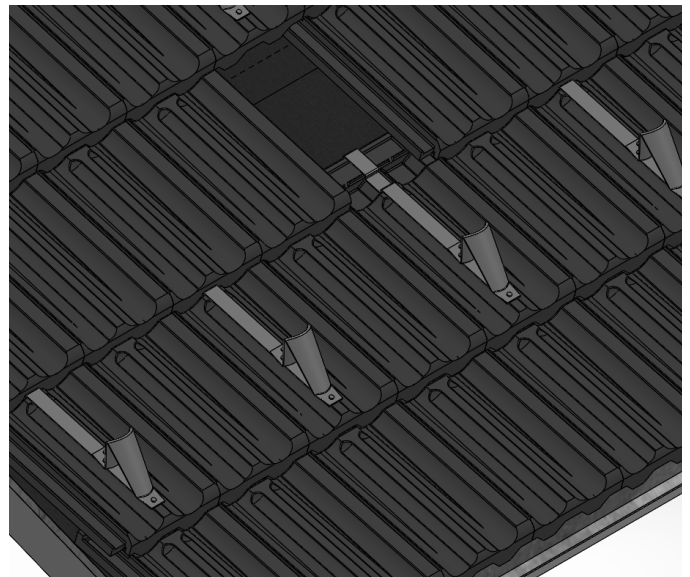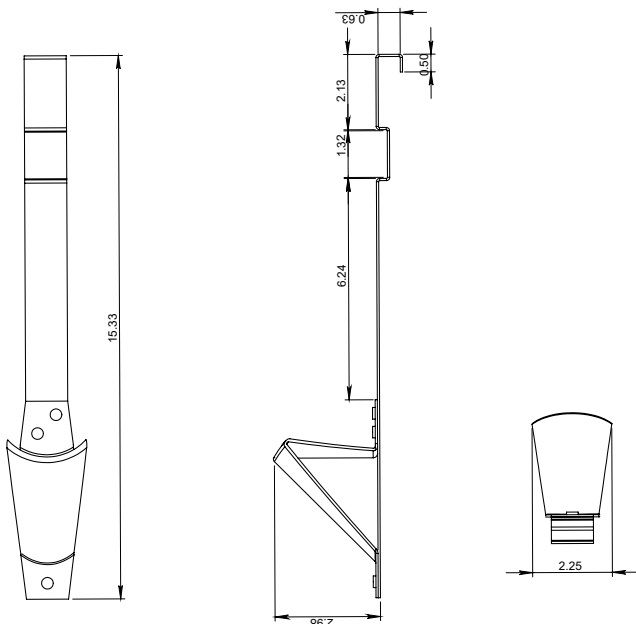

INSTALLATION:
BRACKET IS INSTALLED BY HOOKING TO THE UPPER END OF ROOF TILE. BRACKET IS INSTALLED WITH TRIANGULAR END OF BRACKET AT BUTT END OF ROOF TILE AND UPPER END UNDER THE COURSE ABOVE.

INSTALLATION
DO NOT SCALE

DIMENSIONS *Dimensions shown are in inches.
DO NOT SCALE