

C22 EZ CLAMP-ON

SNAPLOCK PANEL 1" TO 1-1/2" SNAPLOCK

DESCRIPTION

- Designed for 1" to 1½" snaplock standing seam roofs
- Designed for 1.0" tube (see small tube product data sheet)
- Allows for full installation without any penetration of the roof surface
- Powder coated to match roofing material color
- Overall dimensions: 4.45"L X 2.21"W X 5.01"H
- Ice Flags (Recommended)
- Recommended Tools: Tape Measure, Chalk Line, 7/32" Allen Wrench, Deep Well 9/16" Socket, Torque Wrench (15 & 30 LB-FT), Hammer, Circular Metal Saw


MATERIALS

- Zinc Coated Steel: 3/16" (ASTM A36)


COLORS/FINISHES

- Zinc Plated Steel
- Powder coating available in many colors visit <http://trasnowandsun.com/color-chart/> to see color chart



NOTE: Due to specific job conditions, TRA Snow and Sun will only warranty a snow retention system/layout that has been designed by TRA Snow and Sun.

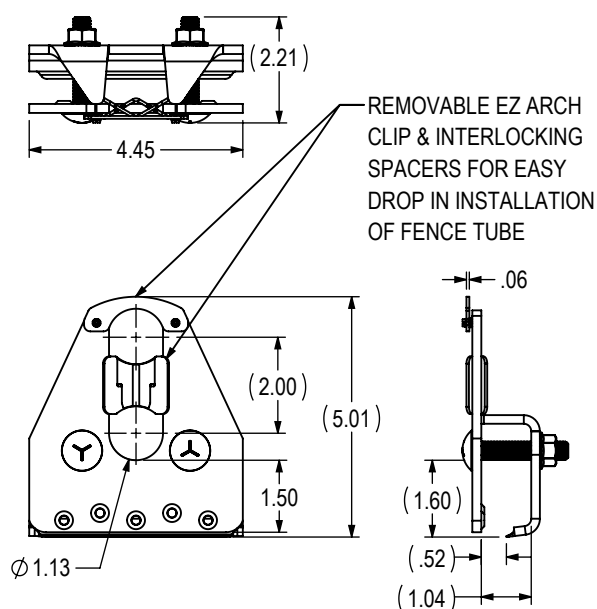

DIMENSIONS
DO NOT SCALE

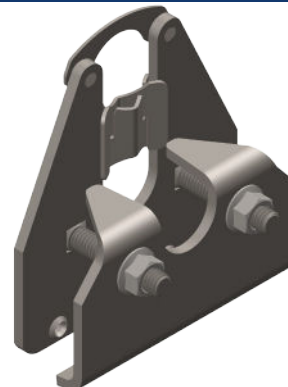

2 RAIL STANDING SEAM SNOW FENCE USED ON: STANDING SEAM METAL

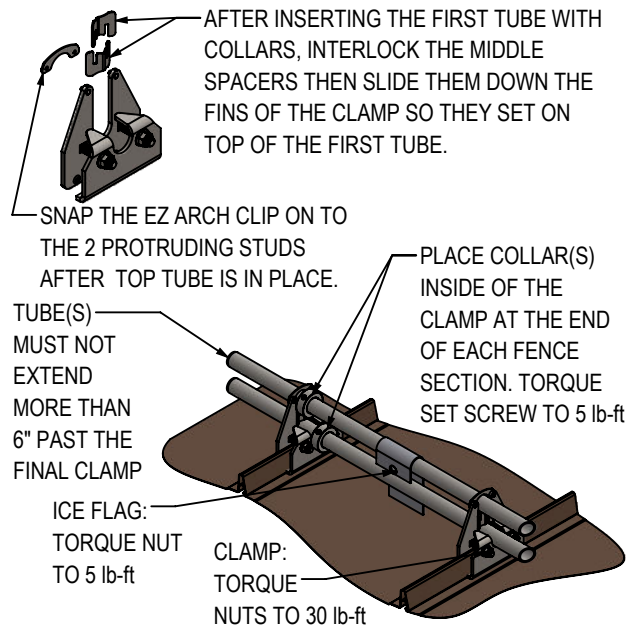

INSTALLATION:

Clamp the snow fence to the rib and torque each bolt to 30 lb-ft. Place collars on the fence tube and position them inside the end clamps. Insert the tube into the clamps, ensuring it extends no more than 6" past the final clamp. Position the collars against the end clamps and torque the collar set screws to 5 lb-ft. Install the interlocking spacers on top of the first tube, repeat the previous steps for top tube and collars, then snap the EZ Arch Clip securely over the two studs. For ice flag installations, torque the nut to 5 lb-ft. For specific placement guidance, contact TRA Snow & Sun.

SNOW RETENTION SYSTEMS