

CORRUGATED ADAPTER PLATE DECK MOUNT - SHEATHING

DESCRIPTION

- Fastens to sheathing
- Installed using eight #14 screws (recommended fasteners sold separately)
- Complementary pieces with Corrugated Adapter Plate are the Snow-Blockers or Rafter Mounts (nuts provided)
- Ice Flags (recommended)
- Butyl applied under the corrugated adapter plate (recommended)
- Designed for 1.0" OD tube
- Powder coated to match roofing material color
- Overall dimensions: 8.00"L X 4.28"W X 1.63"H
- All roof penetrations that go through the underlayment are required to be flashed or sealed


MATERIALS

- Steel: 3/16" (ASTM A1011 & ASTM A36)
- Weathering Steel (known as CORTEN®): 3/16" (ASTM A588)

COLORS/FINISHES



- Uncoated Steel
- Zinc Plated Steel
- Mill Finish A588
- Powder coating available in many colors visit <http://trasnowandsun.com/color-chart/> to see color chart

NOTE: Due to specific job conditions, TRA Snow and Sun will only warranty a snow retention system/layout that has been designed by TRA Snow and Sun.

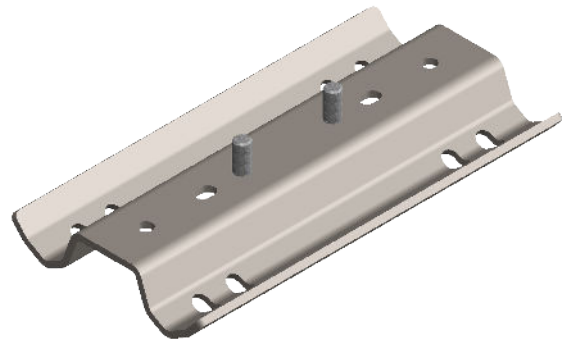

1,2,3 TUBE SNOW FENCE SYSTEM

USED ON: CORRUGATED

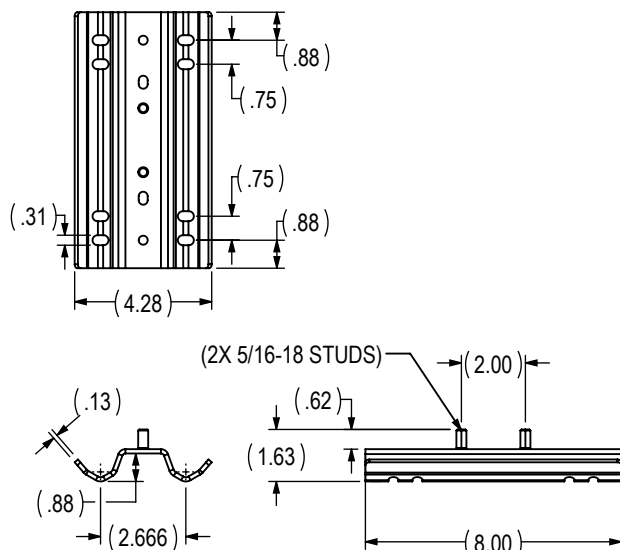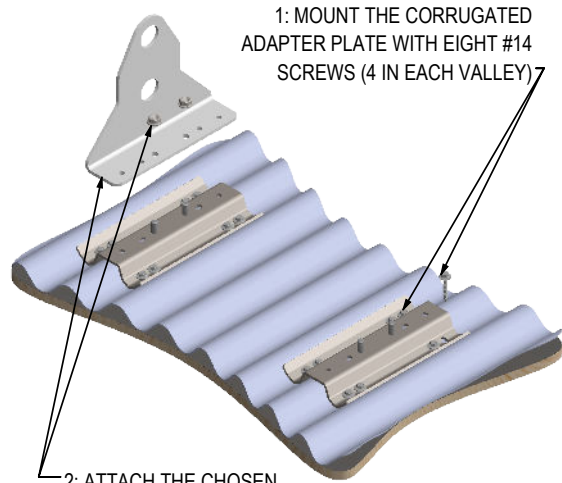

DIMENSIONS
DO NOT SCALE

INSTALLATION INSTRUCTIONS (SHEATHING):

MOUNT THE CORRUGATED ADAPTER PLATE WITH EIGHT #14 SCREWS (4 IN EACH VALLEY) PENETRATING THROUGH THE SHEATHING. ATTACH THE CHOSEN SNOW FENCE TO THE ADAPTER PLATE WITH TWO 5/16-18 NUTS, TORQUED TO 15 LB-FT. THE CORRUGATED ADAPTER PLATE IS A COMPLEMENTARY PIECE WITH THE SNOW BLOCKERS AND RAFTER MOUNTS. WE ADVISE PLACING SOME TYPE OF CAULKING OR SEALANT IN THE LOCATION OF THE HOLES BEFORE INSTALLING. FLASHINGS CAN THEN BE FABRICATED AND PLACED AT THE INSTALLERS DISCRETION. AS AN OPTION, WE DO OFFER BUTYL FLASHING THAT IS APPLIED UNDER THE DECK MOUNT.

SNOW RETENTION SYSTEMS