



SNOW BRACKET™ MADERA - CLASSIC

DESCRIPTION

- Designed for use with Boral's Madera Tile
- No fasteners required
- Can be powder coated to match roofing material color
- Overall dimensions: 13 1/2" L X 1 3/16" W X 3" H

MATERIALS

- Zinc Coated Steel: 16 ga (ASTM A653)
- Copper: 48 oz (ASTM B152)
- Stainless Steel: 16 ga (ASTM A240)

COLORS/FINISHES


- Zinc Plated
- Powder coating available in many colors visit <http://trasnowandsun.com/color-chart/> to see color chart

NOTE: Due to specific job conditions, TRA Snow and Sun will only warranty a snow retention system/layout that has been designed by TRA Snow and Sun.




FOR NEW CONSTRUCTION OR RETROFIT

USED ON: BORAL'S MADERA TILE

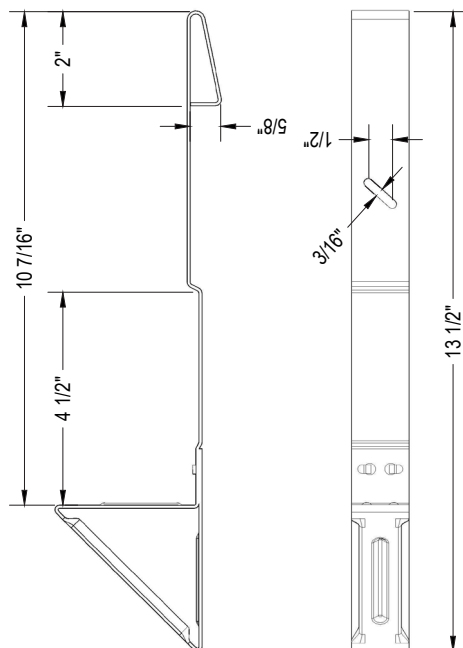

DIMENSIONS
DO NOT SCALE

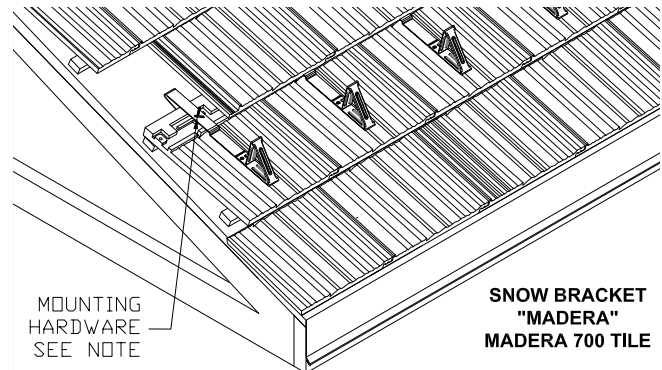

MOUNTING
HARDWARE
SEE NOTE

**SNOW BRACKET
"MADERA"
MADERA 700 TILE**

INSTALLATION INSTRUCTIONS:

SNOW BRACKET HOOKS TO UPPER END OF ROOF TILE AND COUNTER BATTEN. BRACKET IS INSTALLED WITH TRIANGULAR END OF BRACKET AT LOW END OF ROOF TILE AND UPPER END UNDER THE COURSE ABOVE.

NOTE:

IF BRACKET IS COPPER, THEN STAINLESS STEEL SCREWS MUST BE USED TO MOUNT THE BRACKET; OTHERWISE USE SAME FASTENERS ON THE BRACKET AS USED ON THE ROOF TILE.