



SNOW BRACKET™ B - CLASSIC

DESCRIPTION

- Designed for use with concrete tiles 15" in length which are installed using horizontal battens
- No fasteners required
- Can be powder coated to match roofing material color
- Overall dimensions: 16-13/16"L X 1-3/16"W X 4-5/8" H

MATERIALS

- Zinc Coated Steel: 16 ga (ASTM A653)
- Copper: 48 oz (ASTM B152)
- Stainless Steel: 16 ga (ASTM A240)

COLORS/FINISHES


- Zinc Plated
- Powder coating available in many colors visit <http://trasnowandsun.com/color-chart/> to see color chart

NOTE: Due to specific job conditions, TRA Snow and Sun will only warranty a snow retention system/layout that has been designed by TRA Snow and Sun.




FOR NEW CONSTRUCTION OR RETROFIT

USED ON: BARTILE, VANDEHEY AND OTHER SIMILAR TILES

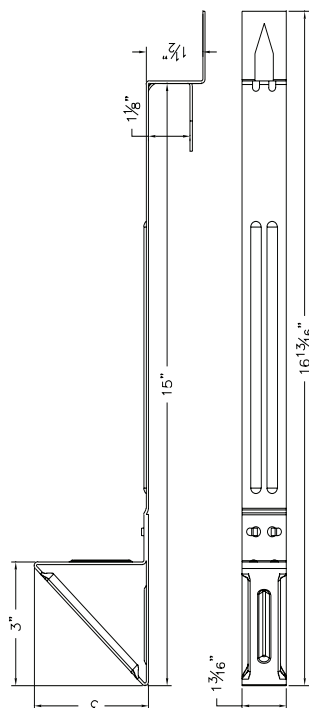

DIMENSIONS
DO NOT SCALE

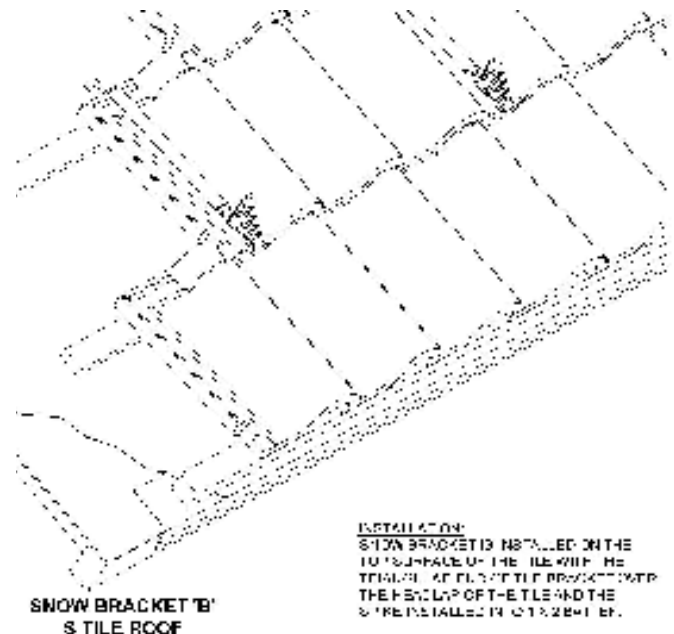

SNOW BRACKET™ B
S TILE ROOF

INSTALLATION:
SNOW BRACKET IS INSTALLED ON THE
TOP SURFACE OF THE TILE WITH THE
TWO TABS OF THE SNOW BRACKET OVER
THE HORIZONTAL BATTEN AND THE
TILE IS REINSTALLED IN ITS ORIGINAL
POSITION.